



**VOLTRIK
ENERGY**



Water Temp
Sensor



Actuator



Charger



Genset
Controller



Auto Voltage
Regulator



Oil Pressure
Sensor



Engine Stop
Solenoid



Gauge



Rubber
Mounting



Governor



**PROFESSIONAL GENERATOR
PARTS MANUFACTURER**

1

Controller

01-04

2

AVR

05-11

3

Actuator

12-13

5

Charger

18-19

6

Engine Stop
Solenoid

20-22

CONTENTS



4

Speed
Governor

14-17

7

Diode Rectifier

23-28

8

Gauges

29-30

9

Other parts

33-34

“Auto Start Control Module 5110





Manual & Auto Start Control Module

OVERALL SIZE
98x79x40mm

PANEL CUTOUT SIZE
80x68mm

3110



Auto Start Control Module

OVERALL SIZE
140x113x43 mm

PANEL CUTOUT SIZE
118x92 mm

4510



Auto Mains (Utility) Failure Control Module

OVERALL SIZE
140x113x43 mm

PANEL CUTOUT SIZE
118x92mm

4520



Auto Start Control Module

OVERALL SIZE
140x113x43 mm

PANEL CUTOUT SIZE
118x92mm

4610



Auto Mains (Utility) Failure Control Module

OVERALL SIZE
140x113x43mm

PANEL CUTOUT SIZE
118x92 mm

4620



Manual Start Control Module

OVERALL SIZE
140x113x43mm

PANEL CUTOUT SIZE
118x92mm

501K



Auto Start Control Module

OVERALL SIZE
72x144x118.5mm

PANEL CUTOUT SIZE
65.5x111mm

520K



Manual & Auto Start Control Module

OVERALL SIZE
72x72x38mm

PANEL CUTOUT SIZE
68x68mm

701MS/AS



Manual & Auto Start Control Module

OVERALL SIZE
84x72x34.9mm

PANEL CUTOUT SIZE
80x68mm

702MS/AS



Auto Start Control Module

OVERALL SIZE
165x125x29mm

PANEL CUTOUT SIZE
149x109 mm

703



Auto Mains (Utility) Failure Control Module

OVERALL SIZE
165x125x29 mm

PANEL CUTOUT SIZE
149x109mm

704



Auto Transfer Switch Control Module

OVERALL SIZE
165x125x29 mm

PANEL CUTOUT SIZE
149x109mm

705



710

Auto start Control Module

OVERALL SIZE
209x146x30.3 mm

PANEL CUTOUT SIZE
182x137mm



720

Auto start Control Module

OVERALL SIZE
209x146x30.3 mm

PANEL CUTOUT SIZE
182x137mm



5110

Auto Start Control Module

OVERALL SIZE
240x172mm

PANEL CUTOUT SIZE
220x160mm



5120

Auto Mains (Utility) Failure Control Module

OVERALL SIZE
240x172mm

PANEL CUTOUT SIZE
220x160mm



5210

Auto Start Control Module

OVERALL SIZE
240x172mm

PANEL CUTOUT SIZE
220x160mm



6110

Manual & Auto Start Control Module

OVERALL SIZE
216x158x43mm

PANEL CUTOUT SIZE
184x137mm



6120

Auto Mains (Utility) Failure Control Module

OVERALL SIZE
216x158x43mm

PANEL CUTOUT SIZE
184x137mm



6010

Auto Start Control Module

OVERALL SIZE
216x158x43mm

PANEL CUTOUT SIZE
184x137mm



6020

Auto Mains (Utility) Control Module

OVERALL SIZE
216x158x43mm

PANEL CUTOUT SIZE
184x137mm



7210

Auto Start Control Module

OVERALL SIZE
240x181x42mm

PANEL CUTOUT SIZE
220x160mm



7220

Auto Start Control Module

OVERALL SIZE
240x181x42mm

PANEL CUTOUT SIZE
220x160mm



7310

Auto Start Control Module

OVERALL SIZE
245x184x51mm

PANEL CUTOUT SIZE
220x160mm



Auto Mains (Utility) Failure Control Module

OVERALL SIZE
245x184x51mm

PANEL CUTOUT SIZE
220x160mm

7320



Synchronising & Load Sharing Control Module

OVERALL SIZE
240x172x57mm

PANEL CUTOUT SIZE
220x160mm

7510



Synchronising & Load Sharing Auto Mains (Utility) Failure Control Module

OVERALL SIZE
240x172x57mm

PANEL CUTOUT SIZE
220x160mm

7520



Synchronising & Load Sharing Auto Start Control Module

OVERALL SIZE
245x184x51mm

PANEL CUTOUT SIZE
220x160mm

8610



Synchronising Auto Mains (Utility) Failure Load Share Control Module

OVERALL SIZE
245x184x51mm

PANEL CUTOUT SIZE
220x160mm

8620



Auto Start Control Module

OVERALL SIZE
245x184x51mm

PANEL CUTOUT SIZE
220x160mm

8660



Manual Remote Start (MRS) Gen-set Controller

OVERALL SIZE
245x184x51mm

WEIGHT
0.35KG

MRS10



Manual Remote Start (MRS) Gen-set Controller

OVERALL SIZE
245x184x51mm

WEIGHT
0.35KG

MRS16



Manual Remote Start (MRS) Gen-set Controller

OVERALL SIZE
245x184x51mm

WEIGHT
0.9KG

MRS11



Auto Mains Failure (AMF) Gen-set Controller

OVERALL SIZE
275x160x95mm

WEIGHT
0.9KG

AMF20



Auto Mains Failure (AMF) Gen-set Controller

OVERALL SIZE
275x160x95mm

WEIGHT
0.6KG

AMF25



Auto Mains Failure (AMF) Gen-set Controller

OVERALL SIZE
275x160x95mm

WEIGHT
1KG

AMF9



DKG105

WEIGHT
0.245kg

SIZE
110x85x85mm



DKG155

WEIGHT
0.245kg

SIZE
110x85x85mm



DKG307

WEIGHT
1.5kg

SIZE
400x320x180mm



DCP-10

WEIGHT
0.35kg

SIZE
160x110x60mm



HGM6110U

WEIGHT
0.8kg

SIZE
220x175x53mm



HGM6120U

WEIGHT
0.8kg

SIZE
220x175x53mm



HGM6110N

WEIGHT
0.56kg

SIZE
209x166x45mm



HGM6120N

WEIGHT
0.56kg

SIZE
209x166x45mm



HGM9510

WEIGHT
0.95kg

SIZE
266x182x45mm



HGM9520

WEIGHT
0.95kg

SIZE
266x182x45mm




HGM1790N

WEIGHT
0.18kg

SIZE
95x86x46.5mm

Automatic Voltage Regulator

SX460

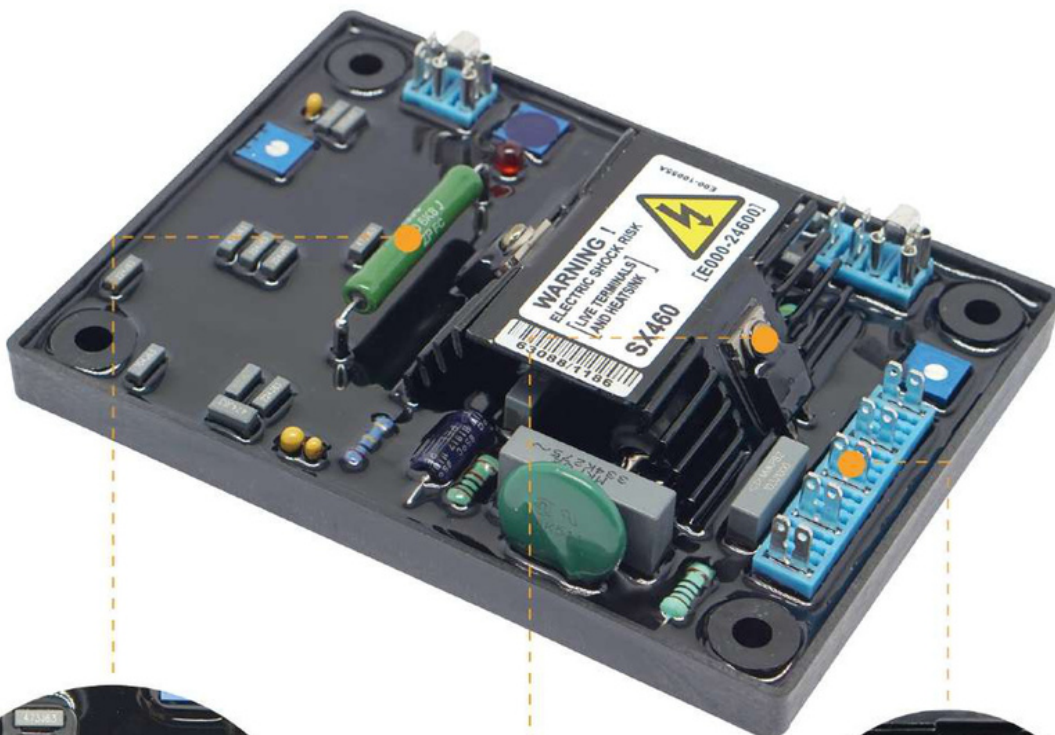

Origin Resistance



Origin ST



4Pins



5Pins



GAVR-8A-DIP

Apply for Brushless

OVERALL SIZE
120x90x60mm

WEIGHT
0.22KG



GAVR-8A-SMT

Apply for Brushless

OVERALL SIZE
120x90x60mm

WEIGHT
0.22KG



GAVR-12A-DIP

Apply for Brushless

OVERALL SIZE
135x100x60mm

WEIGHT
0.31KG



GAVR-12A-SMT

Apply for Brushless

OVERALL SIZE
135x100x60mm

WEIGHT
0.31KG



GAVR-15A-DIP

Apply for Brushless

OVERALL SIZE
170x130x75mm

WEIGHT
0.55KG



GAVR-15A-SMT

Apply for Brushless

OVERALL SIZE
170x130x75mm

WEIGHT
0.55KG



GAVR 20A-DIP

Apply for Brushless

OVERALL SIZE
145x105x65mm

WEIGHT
0.52KG



MX450

Apply for Stamford

OVERALL SIZE
175x150x65mm

WEIGHT
0.4KG



MX321

Apply for Stamford

OVERALL SIZE
230x170x55mm

WEIGHT
0.63KG



MX321-A

Apply for Stamford

OVERALL SIZE
230x170x55mm

WEIGHT
0.63KG



MX341

Apply for Stamford

OVERALL SIZE
170x140x50mm

WEIGHT
0.51KG



MX341-A

Apply for Stamford

OVERALL SIZE
170x140x50mm

WEIGHT
0.51KG



SX440

Apply for Stamford

OVERALL SIZE
175x150x65mm

WEIGHT
0.4KG



SX440-A

Apply for Stamford

OVERALL SIZE
175x150x65mm

WEIGHT
0.4kg



SX460

Apply for Stamford

OVERALL SIZE
175x150x65mm

WEIGHT
0.4KG



SX460-A

Apply for Stamford

OVERALL SIZE
175x150x65mm

WEIGHT
0.4KG



AS440

Apply for Stamford

OVERALL SIZE
175x150x65mm

WEIGHT
0.4kg



AS440-A

Apply for Stamford

OVERALL SIZE
175x150x65mm

WEIGHT
0.4kg



KRS440B

Apply for Stamford

OVERALL SIZE
175x150x65mm

WEIGHT
0.45kg



AS540

Apply for Stamford

OVERALL SIZE
175x15x65mm

WEIGHT
0.38KG



AS480

Apply for Stamford

OVERALL SIZE
175x150x65mm

WEIGHT
0.4KG



R120

Apply for Leroy Somer

OVERALL SIZE
160x85x65mm

WEIGHT
0.5KG



R150

Apply for Leroy Somer

OVERALL SIZE
160x85x65mm

WEIGHT
0.5KG



R220

Apply for Leroy Somer

OVERALL SIZE
160x85x65mm

WEIGHT
0.5KG



R230

Apply for Leroy Somer

OVERALL SIZE
155x90x60mm

WEIGHT
0.3KG



R250

Apply for Leroy Somer

OVERALL SIZE
155x90x60mm

WEIGHT
0.4KG



R438

Apply for Leroy Somer

OVERALL SIZE
165x120x65mm

WEIGHT
0.65KG



R448

Apply for Leroy Somer

OVERALL SIZE
215x150x65mm

WEIGHT
1.1KG



R449

Apply for Leroy Somer

OVERALL SIZE
215x150x65mm

WEIGHT
1.15KG



R450

Apply for Leroy Somer

OVERALL SIZE
215x150x65mm

WEIGHT
1KG



R450-M

Apply for Leroy Somer

OVERALL SIZE
215x150x65mm

WEIGHT
1KG



R450-T

Apply for Leroy Somer

OVERALL SIZE
215x150x65mm

WEIGHT
0.45KG



SR7-2

Apply for Mecc Alte

OVERALL SIZE
92x92x55mm

WEIGHT
0.4KG



UVR6

Apply for Mecc Alte

OVERALL SIZE
170x130x80mm

WEIGHT
0.6KG



DSR

Apply for Mecc Alte

OVERALL SIZE
165x145x55mm

WEIGHT
0.55kg



DER1

Apply for Mecc Alte

OVERALL SIZE
140*110*60mm

WEIGHT
1kg



M16FA655A

Apply for Maralli

OVERALL SIZE
160x110x60mm

WEIGHT
0.4KG



M40FA640A

Apply for Maralli

OVERALL SIZE
230x170x50mm

WEIGHT
0.9KG



AVC63-4

Apply for Basler

OVERALL SIZE
100x67x48mm

WEIGHT
0.25KG



AVC63-4A

Apply for Basler

OVERALL SIZE
140x125x48mm

WEIGHT
0.34KG



AVC63-7/7F

Apply for Basler

OVERALL SIZE
170x130x75mm

WEIGHT
0.56KG



DVR-2000

Apply for Marathon

OVERALL SIZE
150x135x55mm

WEIGHT
0.47KG



BE350

Apply for Basler

OVERALL SIZE
150x20x70mm

WEIGHT
1kg



SE350

Apply for Marathon

OVERALL SIZE
100x68x50mm

WEIGHT
0.26kg



EA350

Apply for Marathon

OVERALL SIZE
130x90x60mm

WEIGHT
0.3kg



EP200

Apply for Marathon

OVERALL SIZE
100x70x50mm

WEIGHT
0.35kg



WT-2

Apply for Engga

OVERALL SIZE
200x160x60mm

WEIGHT
1kg




WT-3

Apply for Engga

OVERALL SIZE
200x160x60mm

WEIGHT
1kg



EA15A

Apply for Kutai

OVERALL SIZE

WEIGHT
0.83KG



VR6

Apply for Caterpillar

OVERALL SIZE
215x163x75mm

WEIGHT
1.5KG



GAVR 35A

Apply for Brushless

OVERALL SIZE
220x150x160mm

WEIGHT
1KG



GAVR 50A

Apply for Brushless

OVERALL SIZE
145x105x65mm

WEIGHT
0.53KG



AVR 75A/100A

Apply for Brushless

OVERALL SIZE
200x200x200mm

WEIGHT
2.5KG



GB-100

Apply for Brush

OVERALL SIZE
120x90x60mm

WEIGHT
0.46KG



DX-7E/GB140

Apply for Brush

OVERALL SIZE
120x90x60mm

WEIGHT
0.46KG



DX-11/GB130

Apply for Brush

OVERALL SIZE
170x130x75mm

WEIGHT
0.85KG



GB160/GB170

Apply for Brush

OVERALL SIZE
120x90x60mm

WEIGHT
0.46KG



DX-8E/GB120

Apply for Brush

OVERALL SIZE
120x90x60mm

WEIGHT
0.46KG



DAVR 95S/S3

Apply for Gasoline

OVERALL SIZE
170x120x30mm

WEIGHT
0.5KG



DAVR 150S/S3

Apply for Gasoline

OVERALL SIZE
110x50x33mm

WEIGHT
0.5KG



Apply for Gasoline

OVERALL SIZE
170x120x30mm

WEIGHT
0.5KG

DAVR 95S/S3



Apply for Gasoline

OVERALL SIZE
110x50x33mm

WEIGHT
0.5KG

DAVR 150S/S3



Apply for Gasoline

OVERALL SIZE
200x200x100mm

WEIGHT
0.5KG

DAVR 250S/S4



Apply for Gasoline

OVERALL SIZE
155x100x50mm

WEIGHT
0.1KG

2KW



Apply for Gasoline

OVERALL SIZE
155x100x50mm

WEIGHT
0.18KG

5KW



Apply for Denyo

OVERALL SIZE
180x250x35mm

WEIGHT
1.3kg

NTA-4A-2SA



Apply for Denyo

OVERALL SIZE
180x250x35mm

WEIGHT
1.5KG

NTA-5A-2T



Apply for Denyo

OVERALL SIZE
180x250x35mm

WEIGHT
1.5KG

NTA-5E-2T



Apply for Denyo

OVERALL SIZE
180x250x35mm

WEIGHT
1.5KG

NTA-5A-27



Apply for Denyo

OVERALL SIZE
180x250x35mm

WEIGHT
1.3KG

NTA-5A-2DB



Apply for Denyo

OVERALL SIZE
180x250x35mm

WEIGHT
1.2KG

AN-5-203



Apply for Denyo


OVERALL SIZE
180x250x35mm

WEIGHT
1.2KG

AS-5-203S

“Speed Control System

ADC225+ESD5500E+MSP675

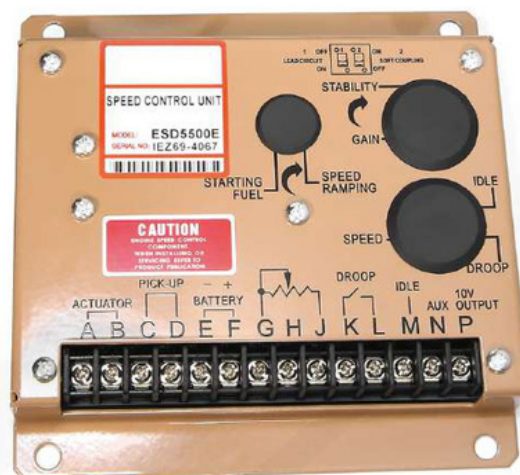

**R180**

Apply for Gasoline

OVERALL SIZE
170x140x50mm**WEIGHT**
0.5KG**MX322**

Apply for Gasoline

OVERALL SIZE
205x155x35mm**WEIGHT**
0.63KG**MX342**

Apply for Gasoline

OVERALL SIZE
153x132x43mm**WEIGHT**
0.47KG**HVR-11**

Apply for Gasoline

OVERALL SIZE
160x110x62mm**WEIGHT**
0.36KG**AS540**

Apply for Gasoline

OVERALL SIZE
160x110x62mm**WEIGHT**
0.3KG**VR06**

Apply for Kangfu

OVERALL SIZE
255x175x92mm**WEIGHT**
0.67KG**KF306A**

Apply for Kangfu

OVERALL SIZE
55x105x55mm**WEIGHT**
0.57KG**KF308A**

Apply for Kangfu

OVERALL SIZE
180x150x65mm**WEIGHT**
0.79KG**6GA2 491-1A**

Apply for Siemens

OVERALL SIZE
260x120x60mm**WEIGHT**
0.67KG**6GA2 491-1A**

Apply for Siemens

OVERALL SIZE
260x120x60mm**WEIGHT**
0.67KG**KXT-2WC**

Apply for Lanzhou Engine

OVERALL SIZE
170x125x80mm**WEIGHT**
0.71KG**TFXT-2**

Apply for Lanzhou Engine

OVERALL SIZE
155x105x55mm**WEIGHT**
0.48KG

ADC120 12V/24V

Apply for GAC
Size: 190X180X180mm
Weight: 2.1kg



ADC225 12V/24V

Apply for GAC
Size: 195X180X175mm
Weight: 3.6kg
12V/24V



ADC175 12V/24V

Apply for GAC
Size: 190X180X180mm
Weight: 2.1kg
12V/24V



3408324

Apply for Cummins
Size: 105X105X115mm
Weight: 1kg



3408326

Apply for Cummins
Size: 105X105X110mm
Weight: 0.9kg



3408328

Apply for Cummins
Size: 105X105X115mm
Weight: 2kg



3408329

Apply for Cummins
Size: 105X105X110mm
Weight: 0.10kg



3085219

Apply for Cummins
Size: 105X105X110mm
Weight: 1kg



A1000C-W

Apply for Fortrust
Weight: 4kg



ADC100A-12V/25A

Apply for GAC
Size: 195X180X175mm
Weight: 2.1kg



C2002 Speed Control System

Apply for Fortrust
Speed Controller: C2002



ESC9800 Speed Control System

Apply for Yunyi
Speed Controller: ESC9800



Speed Governor

30-44196



49-13988



Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Gross Weight	0.85KG
Package Size	155x155x55mm

30-44195



Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Gross Weight	0.85KG
Package Size	155x155x55mm

30-62323



Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Gross Weight	0.85KG
Package Size	155x155x55mm

30-32733



Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Gross Weight	0.85KG
Package Size	155x155x55mm

ESD5500E



Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<90%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

ESD5111



Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

ESD5131



Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

ESD5522E



Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<90%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

ESD5120



Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

ESD5520E



Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<90%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

30-44196

Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz
Gross Weight	0.85KG
Package Size	155x155x55mm

30-62322

Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz
Gross Weight	0.85KG
Package Size	155x155x55mm

30-98693

Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

30-37359

Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

42-96674

Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

42-96675

Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

S6700E

Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120V RMS
Temperature Range	40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

S6700H

Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120V RMS
Temperature Range	40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

49-14090

Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz
Delay	0-30s

49-14091

Working Voltage	24±8V DC
Output Current Range	0-2.5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz
Delay	0-30s

ESD5220


Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz
Overspeed set range	2KHZ-8.5KHZ

ESD5221


Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz
Overspeed set range	2KHZ-8.5KHZ

ESD5550E


Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz
Overspeed set range	2KHZ-8.5KHZ

ESD5570E


Working Voltage	12-32V DC
Output Current Range	0-5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz
Overspeed set range	2KHZ-8.5KHZ

ESD5330


Working Voltage	12-32V DC
Output Current Range	0-10A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

ESD5586E


Working Voltage	12-24V DC
Output Current Range	50mA
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

ESD2210


Working Voltage	12-24V DC
Output Current Range	50mA
Speed Sensor Signal	0.5~50 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz

ECU-SS30


Working Voltage	10-32V DC
Output Current Range	5A
Speed Sensor Signal	0.5~120 V RMS
Temperature Range	-40°C ~ 85°C
Relative Humidity	<95%
Overspeed Set Range	1.0-10KHZ
Package Size	105x105x55mm

EG2000


Operating Voltage	10-32V DC
Outputs Current	Continuous 7A. Max. 15A for 10s
MPU Frequency input	10-10K Hz
MPU Voltage input	1-120VAC
Idle Adjustment Range	30 to 90% of Normal Speed

EG3000


Operating Voltage	10-32V DC
Outputs Current	Continuous 7A. Max. 15A for 10s
MPU Frequency input	10-10K Hz
MPU Voltage input	1-120VAC
Idle Adjustment Range	30 to 90% of Normal Speed

SG6800E


Working Voltage	12 or 24 VDC
Speed Sensor Signal	0.5~120VRMS
Temperature Range	-40°C~85°C
Relative Humidity	<95%
Speed Range	1K-7.5K Hz
Speed Trim Range	±200Hz
Output Current Range	0~8A

Battery Charger

CH2810



BC-125



Voltage: Input 160-250V
Voltage Output : 12V
Current: 5A
Frequency: 50/60HZ
Size: 16x8.7x3.5CM

BC-245



Voltage: Input 160-250V
Voltage Output : 24V
Current: 5A
Frequency: 50/60HZ
Size: 16x8.7x3.5CM

CHR-1445



Voltage: Input 80-250V
Voltage Output : 12V
Current: 3.5A
Frequency: 50/60HZ
Size: 14.7x8.2x4.3CM

CHR-2685



Voltage: Input 80-250V
Voltage Output : 24V
Current: 3.5A
Frequency: 50/60HZ
Size: 14.7x8.2x4.3CM

CH2804



Voltage: Input 160-250V
Voltage Output : 12/24V
Current: 4A
Frequency: 50/60HZ
Size: 14.6x10.2x4.1 CM

CH2806



Voltage: Input 160-250V
Voltage Output : 12/24V
Current: 6A
Frequency: 50/60HZ
Size: 14.6x13x4.1 CM

CH2810



Voltage: Input 160-250V
Voltage Output : 12/24V
Current: 10A
Frequency: 50/60HZ
Size: 16.2x14.7x4.1 CM

BAC06A



Voltage: Input 95-280V
Voltage Output : 24V
Current: 3A
Frequency: 50/60HZ
Size: 14.3x9.2x5.2CM

BAC06A



Voltage: Input 95-280V
Voltage Output : 12V
Current: 6A
Frequency: 50/60HZ
Size: 14.3x9.2x5.2CM

KY9130



Voltage: Input 90-305V
Voltage Output : 12V
Current: 5A
Frequency: 50/60HZ
Size: 13.6x14x6.3CM

KY9255



Voltage: Input 90-305V
Voltage Output : 24V
Current: 5A
Frequency: 50/60HZ
Size: 13.6 x14 x 6.3CM

BC5A-M



Voltage: Input 170-300V
Voltage Output : 12/24V
Current: 5A
Frequency: 45-68Hz
Size: 10.6x11.5x5.7CM

BC10A-M



Voltage: Input 170-300V
Voltage Output : 12/24V
Current: 10A
Frequency: 45-68Hz
Size: 10.6x11.5x5.7CM

Engine Stop Solenoid

XHQ-PT



Option

ETS (energize to stop, standard version) 12V/24V

ETR (energize to run, inverted version) 12V/24V



3991625

24V: 3991625 SA-4959-24
3358076 5267132
12V: 3991624 SA-4959-12

Applicable Model: CUMMINS



3935650

24V: 3935650 SA-4764-24
3970416 2T0201114A
12V: 3935649 SA-4764-12
3965091

Applicable Model: CUMMINS



SA-4752

24V: SA-4752-24 2003-24S7U1B2A
12V: SA-4752-12 2003-12S7U1B2A

Applicable Model: CUMMINS

1751-2467U1B1S5A



24V: 3864274
1751-2467U1B1S5A
1751ES-24E7U1B1S5
SA-3933-24
SA-3766T-24
12V: 1751-1267U1B1S5A
1751ES-12E7U1B1S5
SA-3933-12 SA-3766T-12

Applicable Model: CUMMINS



3919422

24V: 3919423 3931196
SA-3665-24SA-4754-24
1753ES-24A6UC3B1S1
12V: 3919422 3934972
SA-3665-12 SA-4754-12
1753ES-12A6UC3B1S1
3934171 3800603

Applicable Model: CUMMINS



SA-3499

24V: 1751ES-24E2ULB1
1753ES-24E6ULB1S1
SA-3499-24 SA-3786-24
1751ES-24E6ULB5S8
SA-4976-24
12V: 1751ES-12E2ULB1
1753ES-12E6ULB1S1
SA-3499-12 SA-3786-12
1751ES-12E6ULB5S8
SA-4976-12

Applicable Model: KUBOTA



3974947

24V: 3974947 SD-008A2
D59-105-06
12V: 3991624
SA-4959-12

Applicable Model: JOHN DEERE



366-07197

24V: 366-07198
12V: 366-07197
SA-3405T

Applicable Model: LISTER



3930234

24V: 3930234 SA-4335-24
12V: 3930233 SA-4335-12
3923680

Applicable Model: CUMMINS



3932530

24V: 3932530 3939701
SA-4756-24 SA-4891-24
12V: 3932529 3939700
SA-4756-12 SA-4891-12

Applicable Model: CUMMINS



3357411

24V: 3355427
961000780034
2TB130805
12V: 3357411

Applicable Model: CUMMINS



3926412

24V: 3926412 SA-4257-24
RE516083 RE502474
12V: 3926411 SA-4257-12
RE502473

Applicable Model: CUMMINS



AM124379

12V: 3AM124379
AM103337
AM102863

Applicable Model: JOHN DEERE



B4002-1115030

24V: B4002-1115030

Applicable Model: YUCHAI



HL49331000144

12V: HL49331000144

Applicable Model: CUMMINS



4942879

24V: 4942879 D59-002-01A
5254169 5292297
5295567 5295568
5301701 5304951 5346207
12V: 3967168

Applicable Model: CUMMINS



1503ES-12S5SUC12S

24V: 1503ES-24S5SUC12S
12V: 1503ES-12S5SUC12S
119233-77932
119233-77931
M810324 425-35925

Applicable Model: JOHN DEERE



612600180681

24V: 612600180681

Applicable Model: WEICHA



1503ES-12A5UC5S

24V: 1503ES-12A5UC5S
12V: 1503ES-12A5UC5S
17454-60010 SA-4569-T
16616-60010 17594-60014

Applicable Model: KUBOTA



U85206452

404D-22G/2306
10000-47899
HP35107U 404C-22
U85206451 U85206452
U85206520 185206452

Applicable Model: PERKINS



SA-3725

24V: SA-3725-24
12V: SA-3725-12
30A87-20404
30A87-10044
30A87-20400
PJ7415748

Applicable Model: VOLVO



1A021-60017

12V: 1A021-60017
1A021-60013
1A021-60014
1A021-60015
1A021-60016

Applicable Model: KUBOTA



17208-60016

12V: 17208-60015
17208-60016
17208-60010

Applicable Model: KUBOTA



16851-60014

12V: 16851-60014
16851-600
16851-60012
16851-60013
16851-60015
052600-4530 6670776

Applicable Model: KUBOTA



04287583

24V: 04287584
12V: 04287583
04287116
04287114

Applicable Model: DEUTZ



OE52318

12V: 872826 1827650
24V: 873754 872825
OE52318
28V: 81151144

Applicable Model: VOLVO/PERKINS



3050692

Applicable Model: CUMMINS



XHQ-PT

24V: XHQ-PT
HY-PT XHZ-PL XHQ-PTG
12V: XHQ-PT
HY-PT XHZ-PL XHQ-PTG

Applicable Model: WEICHA



HY-PL

24V: HY-PL
12V: HY-PL

Applicable Model: WEICHA



26420472

24V: 26420472 7185-900T
12V: 26420472 7185-900T

Applicable Model: PERKINS

Diode Rectifier

MXY(G)50-12

◀ Distance between two holes : 71mm ▶



Voltage : 1200V-1600V

3pins or 4pins Poles

Rotations 3-phase half bridge modules

	Model Number	weight	Packing	Current	Voltage	Aperture
1	MXY(G)16A	0.2KG	2sets/box (4pcs)	16A	1200V-1600V	63mm
2	MXY(G)25A	0.2KG	2sets/box (4pcs)	25A	1200V-1600V	63mm
3	MXY(G)30A	0.28KG	2sets/box (4pcs)	30A	1200V-1600V	71mm
4	MXY(G)40A	0.28KG	2sets/box (4pcs)	40A	1200V-1600V	71mm
5	MXY(G)50A	0.28KG	2sets/box (4pcs)	50A	1200V-1600V	71mm
6	MXY(G)90A	0.9KG	1sets/box (2pcs)	90A	1200V-1600V	160mm
7	MXY(G)110A	0.9KG	1sets/box (2pcs)	110A	1200V-1600V	160mm
8	MXY(G)150A	0.9KG	2sets/box (2pcs)	150A	1200V-1600V	160mm



MXY(G)30-12



MXY(G)40-12



MXY(G)50-12



MXY(G)70-12



MXY(G)100A-12



MXY(G)150A-12



MDS100A-1



M50100TB160



M50100SB160



MDQ300A



MDS50A



MTC110A

Apply for stamford generator

	SINGLE PIECE	WHOLE SET	ASSEMBLY
RSK1001 (25A)			
RSK2001 (25A)			
RSK5001 (40A)			
RSK6001 (75A)			
82PFR80	 made in india made in china	 made in india	 made in china

■ Apply for leroy somer




330-25777



SSAYEC432-1



LSA46



LSA49

■ Other



B-525571-B-525570




T18 for Mecc Alte



T30-1












100A 1200V



Bridge

Single Phase		
Item	Size(mm)	Current
QL10A	60x100x55	10A
QL20A	60x100x55	20A
QL30A	60x100x55	30A
QL40A	60x100x55	40A
QL50A	60x100x55	50A
QL60A	60x100x55	60A
QL100A	60x100x55	100A
QL150-300A	132x145x75	150-300A
MXV(G)150A	28x28x22	10-50A

Three Phase		
Item	Size(mm)	Current
QL10A	60x100x55	10A
QL20A	60x100x55	20A
QL30A	60x100x55	30A
QL40A	60x100x55	40A
QL50A	60x100x55	50A
QL60A	60x100x55	60A
QL100A	60x100x55	100A
QL150-300A	132x145x75	150-300A
SKBPC10-50A	28x28x22	10-50A

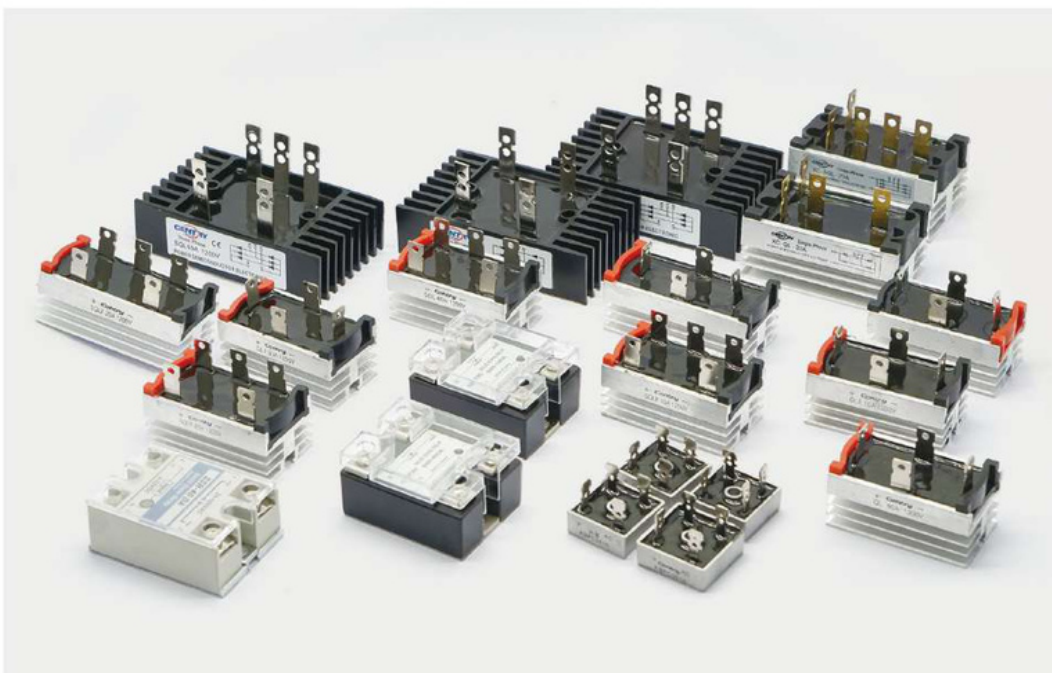

Water Heater				
Rated Power	500W	1000W	1500W	2000W
Rated Voltage	AC240V			
Rated Current	2A	4.2A	6.3A	8.3A
Engine	0-2.5L	2.5-5.7L	5.7-8.2L	8.2-13L
Thermostat Set	45°C			
Temperature Switch	off/45°C on/25°C, Customized			
Insulating	>= 50MO			
Electrical	AC1.5KW 1Min			
Inlet/Outlet Size	16MM			
Max.Water pressure	0.5Mpa			
Protection Class	IP54			



Water heater
500W to 2000W
for diesel engine

ATS											
 3 or 4 poles ATS 63A to 3000A Generator Automatic Transfer Switch											
Item		KY-100	KY-160	KY-250	KY-400	KY-630	KY-800	KY-1250	KY-1250	KY-2500	KY-3200
Usage Category		AC-33IB									
Ue Rater working voltage		AC400V	AC380V	AC380V	AC400V	AC400V	AC400V	AC400V	AC400V	AC400V	AC400V
Ui Rater insulation voltage		690V									
Ump rated short-time withstand current		6KV									
Icw Rated short-time withstand current		10KA			30KA		30KA				
Service Life (Times)	Mechanical	4500	5000	5000	3000	2000	2500	2500	2500	1500	1500
	Electrical	1500	1000	1000	1000	1000	500	500	500	500	500
Pole No.		3 or 4 poles									
Operating Cycles(S/Times)		30S				60S					
Switching Time		0-99S									

Gauge for Cummins

Hour Gauge



3049555

Working Voltage
12/24V
Mounting Dimension
85mm
Gross Weight
0.32Kg
Package Size
102x98x98mm

Speed Counter



3031734

Working Voltage
12/24V
Mounting Dimension
85mm
Gross Weight
0.32Kg
Package Size
102x98x98mm

Oil Pressure Gauge



3015232

Working Voltage
12/24V
Mounting Dimension
55mm
Gross Weight
0.14Kg
Package Size
75x60x60mm

Voltage Gauge



3015235

Working Voltage
12/24V
Mounting Dimension
55mm
Gross Weight
0.14Kg
Package Size
75x60x60mm

Oil Temp Gauge



WTG-3015233

Working Voltage
12/24V
Mounting Dimension
55mm
Gross Weight
0.14Kg
Package Size
75x60x60mm

Water Temp Gauge



3015234

Working Voltage
12/24V
Mounting Dimension
55mm
Gross Weight
0.14Kg
Package Size
75x60x60mm

Hour Gauge



3035766

Working Voltage
8-32V GENERAL
Mounting Dimension
55mm
Gross Weight
0.14Kg
Package Size
75x60x60mm

Gauge for VDO

Voltage Gauge



G-117

Working Voltage
12/24V
Rang
8~16V, 16~32V
Mounting Dimension
52mm
Gross Weight
135g

Hour Gauge



G-H

Working Voltage
19~31V
Rang
0~99999H
Mounting Dimension
52mm
Gross Weight
135g

Water Temp Gauge



G-001B

Working Voltage
12/24V
Rang
38~120°C
Mounting Dimension
52mm
Gross Weight
135g

Oil Temp Gauge



G-002B

Working Voltage
12~24V
Rang
50~150°C
Mounting Dimension
52mm
Gross Weight
135g

Oil Pressure Gauge



G-003B

Working Voltage
12/24V
Rang
0~10BAR
Mounting Dimension
52mm
Gross Weight
135g

Oil Temp Gauge



310 030 015

Working Voltage
12V
Rang
—
Mounting Dimension
52mm
Gross Weight
—

Gauge for Cummins

Water Temp Gauge



310 030 002

Working Voltage
12V

Rang
—

Mounting Dimension
52mm

Gross Weight
—

Oil Temp Gauge



301 030 001

Working Voltage
12V

Rang
—

Mounting Dimension
52mm

Gross Weight
—

Oil Pressure Gauge



350 030 017C

Working Voltage
12V

Rang
—

Mounting Dimension
52mm

Gross Weight
—

Oil Pressure Gauge



350 030 016C

Working Voltage
12V

Rang
—

Mounting Dimension
52mm

Gross Weight
—

Voltage Gauge



332 030 001

Working Voltage
12V

Rang
—

Mounting Dimension
52mm

Gross Weight
—

Speed Counter



NLCB-1

Working Voltage
12V/24V

Rang
0~20~40~60~80~100~120

Working interval
—

Mounting Dimension
85mm

Other

Oil Temp Gauge



NSW-1

Working Voltage
12V/24V

Rang
50~60~80~100~115°C

Working interval
60~100

Mounting Dimension
55mm

Water Temp Gauge



NYW-1

Working Voltage
24V

Rang
40~60~120~140°C

Working interval
60~120

Mounting Dimension
55mm

Voltage Gauge



NDY24-1

Working Voltage
12V

Rang
18~20~24~28~32V

Working interval
18~32

Mounting Dimension
55mm

6L2A



Working Voltage
—

Rang
0~1000V

Installation hole size
76x76mm

Dimensions
80x80x68mm

6L2Hz



Working Voltage
0~500V

Rang
0~500V

Installation hole size
76x76mm

Dimensions
80x80x68mm

6L2V



Working Voltage
0~500V

Rang
0~500V

Installation hole size
76x76mm

Dimensions
80x80x68mm

69L13



Working Voltage
0~500V

Rang
0~500V

Installation hole size
60mm

Dimensions
80x66x58mm

85L1V



Working Voltage
0~500V

Rang
0~500V

Installation hole size
49mm

Dimensions
64x56x41mm

FUEL



Working Voltage
—

Mounting Dimension
45mm

Gross Weight
—

Package Size
80x1000mm

Oil Pressure Sensor



VDO 1/4, 1/8



OPS



3015237-1



3015237



3967251



ES2P-100



ESP-100



1/4 1/8



1/8



622-333



3408607

Water Temperature Sensor



Water Sensor
VDO 1/2, 3/8



Water Sensor
3015238



Water Sensor
622-337 (3/8)



3408627

Magnetic Speed Pick-up Sensor



Speed Sensor
3034572



Speed Sensor
3655944



Speed Sensor
213272



Speed Sensor
MSP675

■ Magnetic Speed Pick-up Sensor



Speed Sensor
MSP676



Speed Sensor
MSP677



Speed Sensor
MSP678



Speed Sensor
MSP679



Speed Sensor
MSP6710



Speed Sensor
MSP6714



Speed Sensor
MSP6719



Speed Sensor
MSPP6721



Speed Sensor
MSP6724



Speed Sensor
MSP6729



Speed Sensor
MSP6731



Speed Sensor
171-233



Speed Sensor
171-257



Speed Sensor
16x1.5

■ Canopy Parts



Damping Mount



Fuel filler



Lock



Hinge



Water Tank Cap



Rain Cover



Switch Button Box



Starting Relay

■ Alternator Parts



8x10
Brush Holder



Switch box



Engine Rear Cover



Engine Fan



Collector Ring



Brush
J204



Carbon brush holder



Connection module
12V 24V

■ Engine Stop Solenoid



Applicable Model:
CUMMINS

3017993



Applicable Model:
CUMMINS

3054609



Applicable Model:
CUMMINS

3018453



Applicable Model:
CUMMINS

3054610

■ Speed control board




30-30256/24V DC



30-36453/24±8V DC



30-53065/24V DC



30-53060/24V DC


Control Box



KZX-501K



KZX-Brushless
instrument



KZX-6110U



KZX-6120N



KZX-ZL-21

Current Transformer



BH-0.66



DSC_2949



DSC_2951



LM-0.5



LMZ1-0.5

Switch



LW5-2



LW8 YH3-3



LW8D-10D4043-B



LW12 LH3-3



LW12 YH2-2

VOLTRIK ENERGY

Istanbul

Mehmet Ali Çakmak

+90 507 752 29 62

Adres: İhlamurkuyu mah. Tecelli sokak. No:6/B
Ümraniye / istanbul

info@voltrikenergy.com

Pazartesi-Cumartesi: 09:00-21:00



VOLTRIK ENERGY

South Africa

Conrad Van Zyl

+44 7526 285625

info@voltrikenergy.com

Monday-Saturday: 09:00 AM – 09:00 PM



VOLTRIK ENERGY

United Kingdom

Denis Fathers

+44 7392 607771

info@voltrikenergy.com

Monday-Saturday: 09:00 AM – 09:00 PM

